


TPB BREAKERS



- Alloy steel forgings: provide maximum durability.
- Four bolt back head design: stands up in rugged use.
- Quick change latch type forged retainer: simple change of chisel.
- Hex shank: possible to use asphalt cutters and spades.

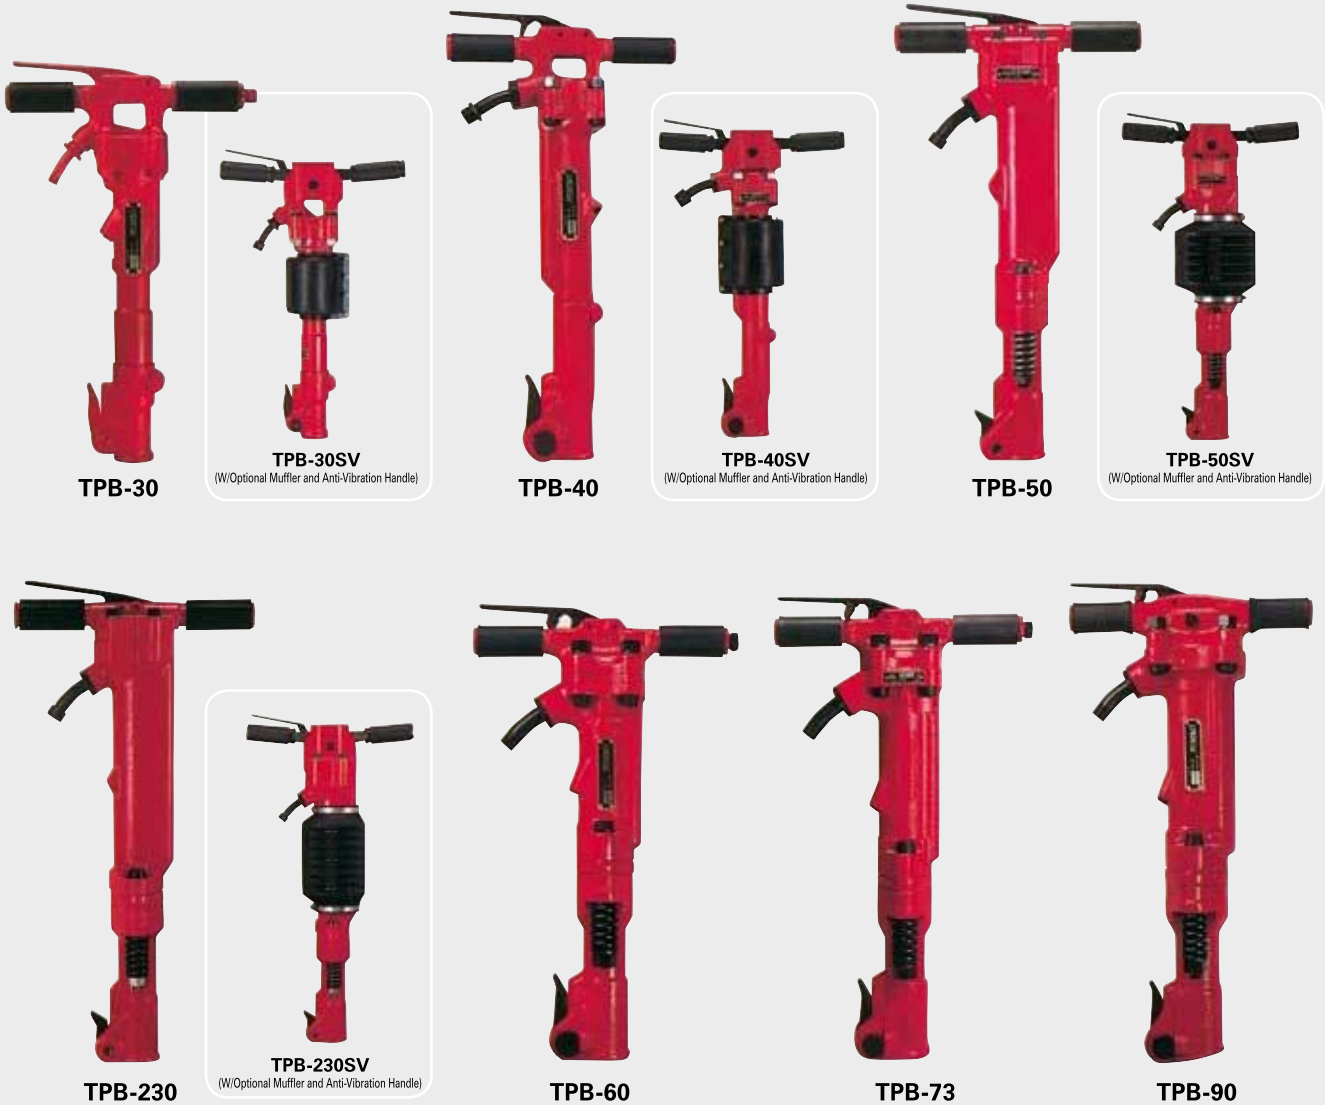

STANDARD ON ALL BREAKERS
Available For

TPB-230(SV)

TPB-73
TPB-60
TPB-50

TPB-40
TBP-30
TCD-30
TCD-20

MODEL NO.	PISTON DIAMETER mm	PISTON STROKE mm	BLOW PER MIN. b.p.m.	NET WEIGHT		OVERALL LENGTH mm	AIR CONSUMPTION		HOSE SIZE mm	SHANK SIZE	AIR INLET SIZE PT
				kg	lb		m ³ /min	c.f.m.			
TPB-30	44.45	85	1,550	15.0	33.0	564	1.4	49.0	12.7	7/8X3-1/4 or 1X4-1/4	1/2
TPB-40	44	146	900	18	39.6	660	1.6	56.0	19	1X4-1/4	3/4
TPB-50	50	156	1,050	22.1	48.6	642	1.4	49.0	19	1-1/8X6 or 1-1/4X6	3/4
TPB-230	50	186	900	27.7	61	748	1.4	49.0	19	1-1/8X6 or 1-1/4X6	3/4
TPB-60	57.15	100	1,400	30.0	66.0	645	2.0	70.0	19	1-1/8X6 or 1-1/4X6	3/4
TPB-73	57.15	144	1,200	31.0	69.7	690	1.8	63.0	19	1-1/4X6	3/4
TPB-90	66.67	152	1,250	42.0	92.4	723	2.2	77.0	19	1-1/8X6 or 1-1/4X6	3/4